


INDUSTRIAL RANGE

INDUSTRIAL GRADE LOOSE LAY FLOORING SYSTEM BY TEK TILE AUSTRALIA

ESD | TEXTURED DOVETAIL | STUDDED T-JOIN | HIDDEN JOIN | CHEQUERED PLATE | ANTISTATIC

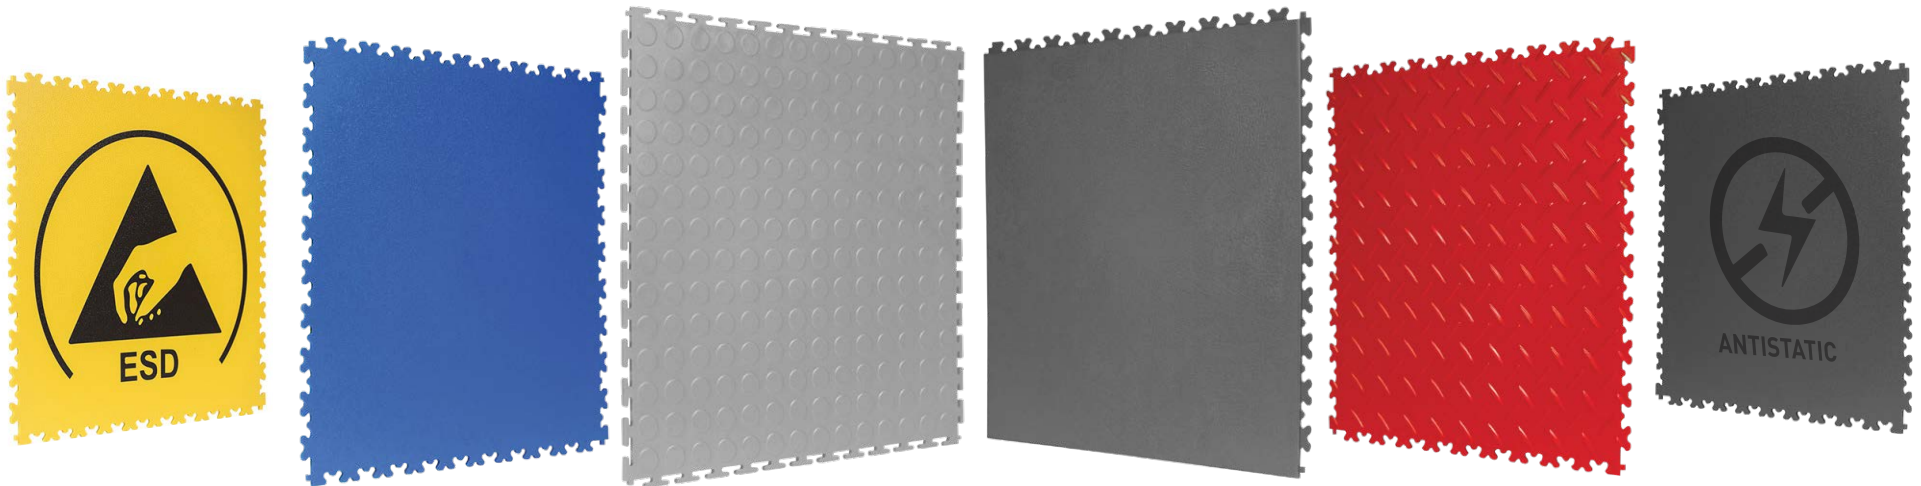

Tek Tile
AUSTRALIA



INDUSTRIAL RANGE

BUILT TO WITHSTAND RIGOROUS INDUSTRIAL ENVIRONMENT

Manufactured in the UK from hard-wearing PVC, TekTile industrial interlocking floor tiles provide cost-effective, robust and hard-wearing floor tiles that have been specifically designed for areas where fork trucks, pallet trucks and stillages are in constant use.

The TekTile range was developed with the needs of multiple sectors of industry in mind. Our research and development team have advanced our products with features such as non-slip and chemical resistance. From production to installation, our products have been designed for easy installation and even easier maintenance. In areas such as high traffic factory floors, the surface needs to be able to withstand heavy machinery while offering an easy cleaning solution.

1

INDUSTRIAL RANGE



LOW VOC
EMISSION



R10 SLIP
RESISTANCE



FIRE RETARDANT



INDUSTRY PROVEN
- HEAVY DUTY



EXCELLENT
LIGHTFASTNESS



EASY INSTALLATION
SAVES LABOUR & TIME

SAPPHIRE BLUE

BLUE

RED

MAROON



STANDARD COLOURS

Standard TekTile Industrial Range can be ordered in these colours
Samples are available for colour match
Excellent Lightfastness Rating (7 Blue Wool Scale)

BLACK

DARK GREY

LIGHT GREY

WHITE

BEIGE


YELLOW


























GREEN



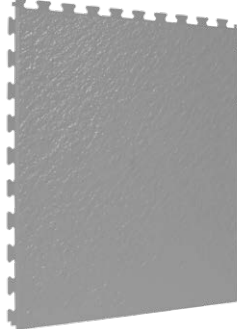









TEXTURED DOVETAIL

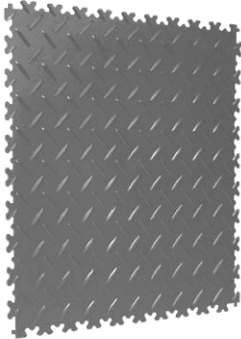

STUDDED T-JOIN



Available Thickness	4mm	5mm	7mm	9mm	5mm	7mm
Compatible for	 Foot Traffic	 Foot Traffic  Pallet Jack 500kg max. load	 Foot Traffic  Small Fork Lift 1000kg max. load  Cars / Trucks	 Foot Traffic  Large Fork Lift 2000kg max. load  Cars / Trucks	 Foot Traffic  Pallet Jack 500kg max. load	 Foot Traffic  Small Fork Lift 1000kg max. load  Cars / Trucks
Suitable for	Light Commercial/ Industrial Foot Traffic	Shops, Schools, Aged Care, Sports & Leisure	Factory/Warehouse	9mm tiles will accept Reach trucks on the proviso tiles are glued due to the nature of the vehicle	Shops, Schools, Aged Care, Sports & Leisure	Factory/Warehouse
Colours & PU Coating	      PU Coat & Standard Colours Available     					
Slip Rating	P3 (R10) Slip Rated					
Warranty	10 Years Limited TekTile Australia Warranty					

CHECKERED PLATE	LEATHER EXCEL HIDDEN JOIN		SLATE HIDDEN JOIN	
				
4mm	5mm	7mm	6mm	Available Thickness
 Foot Traffic	 Foot Traffic  Pallet Jack 500kg max. load	 Foot Traffic  Small Fork Lift 1000kg max. load  Cars / Trucks	 Foot Traffic  Pallet Jack 500kg max. load	Compatible for
Industrial Foot Traffic/Sports & Leisure	Shops, Schools, Aged Care, Sports & Leisure	Factory/Warehouse	Offices / Showrooms / Design Studios/Domestic	Suitable for
 PU Coat & Standard Colours Available				Colours & PU Coating
P3 (R10) Slip Rated				Slip Rating
10 Years Limited TekTile Australia Warranty				Warranty



SUSTAINABLE MANUFACTURING

The TekTile range of tiles are designed and manufactured with the environment in mind. Once they have reached the end of their lifecycle, we can collect the tiles and recycle them to produce the next generation of TekTile products.

We are proudly manufacturing our tiles without any wastage as any rejected and surplus material is recycled.



COMPOSITION

FREE of Formaldehyde
FREE of heavy metals
FREE of solvent



LIFE CYCLE ANALYSIS

Eco-designed according to a product specific Life Cycle Analysis
Product specific EPD (Environmental Products Declaration) available
Manufactured in an ISO 14001 compliant site





MADE WITH RECYCLED CONTENT

Up to 80% recycled content is used in the making of TekTile products



RECYCLING

100% of the tiles can be recycled at the end of the life cycle

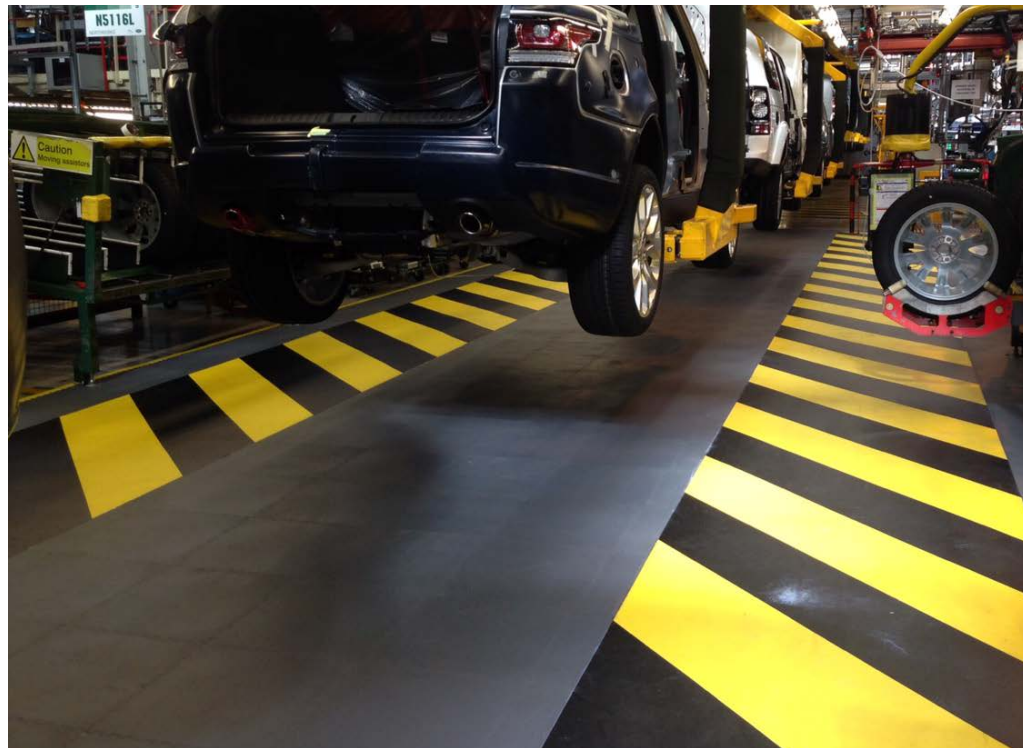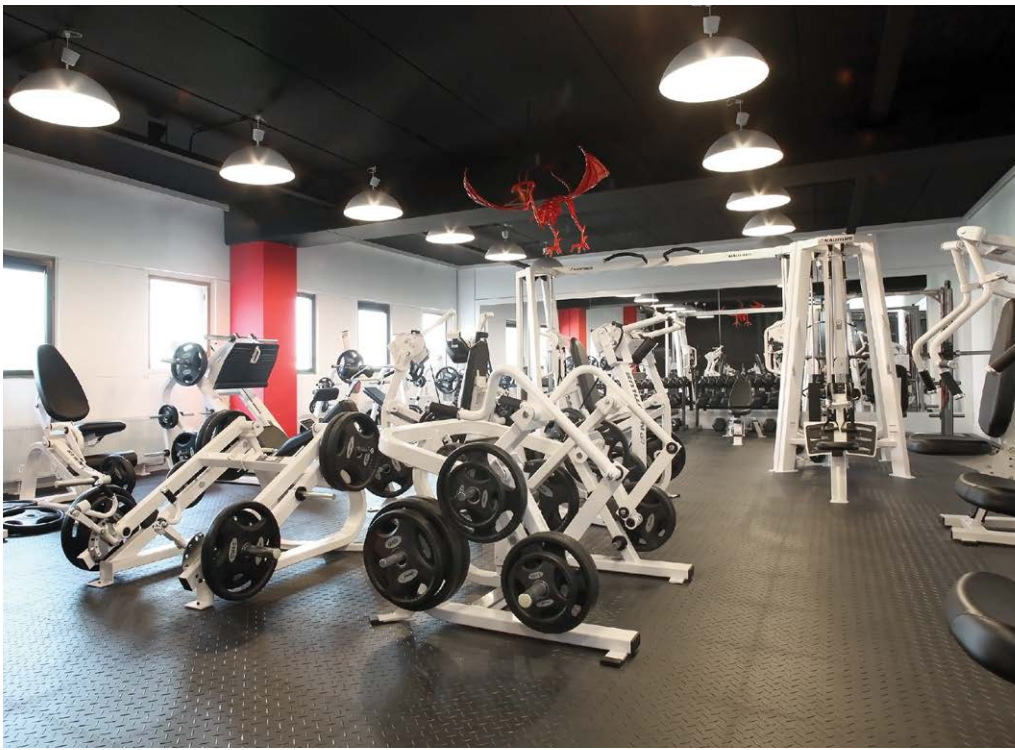



Technical Information	Standard			
Tile Dimensions		Textured: 7mm-508x508mm Excel: 7mm-508x508mm Studded: 7mm-516x516mm	Textured: 5mm-508x508mm Excel: 5mm-508x508mm Studded: 5mm-516x516mm Slate: 6mm-450x450mm	Excel: 5mm - 508x508mm Slate: 6mm - 450x450mm Chequer: 4mm - 508x508mm
Weight		7mm: 9.2kg/m ²	4 / 5 mm: 6.4 / 8 kg/m ²	5 mm: 8 kg/m ²
Hardness	ISO 868	92 Shore A (available in 82 shore A)	92 Shore A (available in 82 shore A)	92 Shore A (available in 82 shore A)
Material		PVC SGI 1.45	PVC SGI 1.45	PVC SGI 1.45
Thickness	BS EN 428	7mm ± .2mm	4 / 5 mm ± .2mm	5 mm ± .2mm
Abrasion	BS EN 660-2	Group P wear rating	Group P wear rating	Group P wear rating
Castor Wheel	BS 425	No Damage	No Damage	No Damage
Indentation	BS 433	.1 mm	.1 mm	.1 mm
Fire Class	EN 13501-1	BFL s1	BFL s1	BFL s1
Electrical Resistance	BS EN 1081	≤10 ¹² Ω	≤10 ¹² Ω	≤10 ¹² Ω
Anti Slip	AS 4586:2013 A	P3 (R10)	P3 (R10)	P3 (R10)
Chemical Resistance	BS EN 423	Good	Good	Good
Light Fastness (Blue Wool Std.)	BS EN 20105	7BWS / 5GSR	7BWS / 5GSR	7BWS / 5GSR
Thermal Conductivity	BS EN 8302	7mm: 0.3807 m ² K/W	5mm: 0.277 m ² K/W	5mm: 0.277 m ² K/W




TEKTILE ANTI-STATIC

DAMPENS ELECTROSTATIC DISCHARGE

COMPUTER SHOP, SERVER ROOM, FACTORY

The TekTile Anti-static floor tiles are static dissipative or conductive flooring designed for the use in areas where components or individuals need to be protected from the risk of anti-static charge.

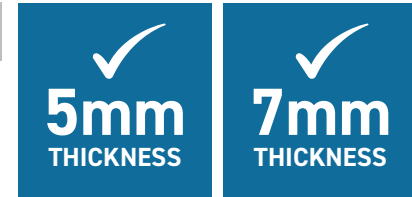

ANTISTATIC TILES TECHNICAL DATA



Technical Data	Standard	R-Tile Industrial 5mm, 7mm
Tile Dimensions		5mm: 508mmx508mm (10 tiles per pack) 7mm: 508mmx508mm (8 tiles per pack)
Weight		5mm: 7.6kg/m ² 7mm: 10kg/m ²
Hardness	ISO868	92 Shore A
Material		PVC SGI 1.45
Thickness	BS EN 428	5mm, 7mm ± 0.2mm
Wear Resistance	BS EN 660-2	Wear Group T
Castor Wheel	BS EN 425	No Damage
Indentation	BS EN 433	0.06mm
Fire Class	EN 13501-1	Bfl-s1
Electrical Resistance	BS EN 1081	10 ⁸ - 10 ⁹
Anti Slip	AS 4586:2013 A	P3 (R10)
Chemical Resistance	BS EN 423	Good
Light Fastness (Blue Wool Standard)	BS EN 20105 - B02	7BWS/5GSR
Thermal Conductivity	ISO 8302	0.03807m2K/W
Flexibility	BS EN 435	Flexibility No Cracking
Dimensional Stability Before Exposure to Heat	BS EN 434	0.11%
Dimensional Stability After Exposure to Heat	BS EN 434	Average 0.19
Density	BS EN 436: 1994	Average 1404kg/m ²

TEKTILE ESD



COMPUTER SHOP, SERVER ROOM, FACTORY

The TekTile Electrostatic Discharge (ESD) interlocking floor tiles are manufactured using an injection moulding process; guaranteeing a permanent ESD performance. Used in accordance with an earthing kit and conductive matrix, TekTile ESD Tiles will create a safe conductive floor that can be used as your primary ground.

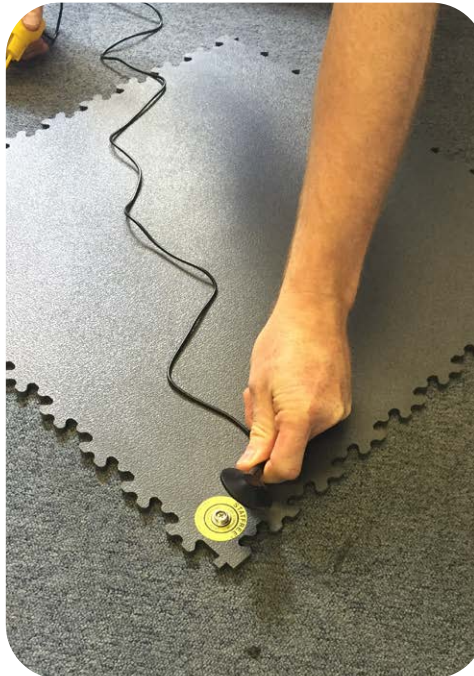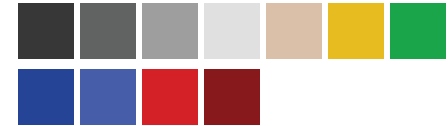

GROUNDING KIT
Required per 100 m²
CONDUCTIVE TAPE
1.25m required per 1m²

ESD TILES TECHNICAL DATA

Technical Data	Standard	R-Tile Industrial 5mm, 7mm
Tile Dimensions		5mm: 508mmx508mm (10 tiles per pack) 7mm: 508mmx508mm (8 tiles per pack)
Weight		5mm: 7.6kg/m ² 7mm: 10kg/m ²
Hardness	ISO868	92 Shore A
Material		PVC SGI 1.45
Thickness	BS EN 428	5mm, 7mm +/- 0.2mm
Wear Resistance	BS EN 660-2	Wear Group T
Castor Wheel	BS EN 425	No Damage
Indentation	BS EN 433	0.06mm
Fire Class	EN 13501-1	Bfl-s1
Electrical Resistance	IEC 61340-5-1:2007 EN 61340-5-1:2007	10 ⁴ 5 - 10 ⁴ 7
Anti Slip	AS 4586-2013A	P3 (R10)
Chemical Resistance	BS EN 423	Good
Light Fastness (Blue Wool Standard)	BS EN 20105 - B02	7BWS/5GSR
Thermal Conductivity	ISO 8302	0.03807m2K/W
Flexibility	BS EN 435	Flexibility No Cracking
Dimensional Stability Before	BS EN 434	0.11%
Exposure to Heat		
Dimensional Stability After Exposure to Heat	BS EN 434	Average 0.19



Tek Tile

A U S T R A L I A



24 Stennett Road
Ingleburn NSW 2565
Tel: 1300 66 22 14

WWW.TEKTILE.COM.AU

ONLINE SHOP | PRODUCT INFORMATION | CUSTOMER SUPPORT