




DESIGN RANGE

COMMERCIAL | OFFICE | RESIDENTIAL | RETAIL

TekTile's Flagship Flooring System

Available with Premium Finishes and Inbuilt Polyurethane (PU) Coating, the Design Tile is the next generation of heavy-duty, hidden interlock, loose lay Luxury Vinyl Tile (LVT). The Design Tile is the ideal solution for many types of high traffic space; having the aesthetics of ceramic tiles and hardwood flooring with the advantages of vinyl flooring. The Design Tile features a heterogenous construction, reinforced with fibreglass to create a flooring solution that will perform for many years to come.

Manufactured in the UK with sustainable manufacturing practices, our products are guaranteed to have outstanding fit and finish.

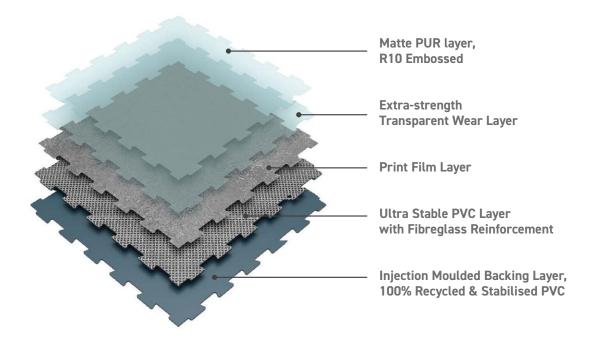

Manufactured with Precision, Consistency, and Longetivity in mind

- Design Tile is a multi-layered interlocking loose lay vinyl tile with polyurethane treatment (PUR+), 7.8mm thick with a dovetail joint, abrasion group T (highest wear resistance group). It is manufactured using a continuous patented high pressure process. Reinforced with oblong fillers, Urban tile offers class-leading resistance to traffic.
- Design Tile is reinforced with an ultra-stable fibreglass grid on a pressed homogeneous layer.
- Design Tile backing is an homogeneous component made from ultra-stable material using a high pressure process.
- It is 100% recyclable and made with up to 80% recycled content.

Reliability you can trust

TekTile flooring solutions can be found throughout Australia, Asia, Europe and the USA with an unparalleled reputation for quality and excellence.

With 10 years limited TekTile Australia warranty, Design Tile is guaranteed to perform for years to come.





CLAY

DARK GREY GROUT

CLAY.DGX



DARK
OAK
BLACK GROUT
DOAK.BKX

VINTAGE ASH CUSTOM GROUT VASH.XXX





















SAND STONE LIGHT GREY GROUT SAND.LGX




MARBLE
LIGHT GREY GROUT
MARB.LGX

LIGHT
OAK
BLACK GROUT
LOAK.BKX

LIME STONE WHITE GROUT LIME.WHX



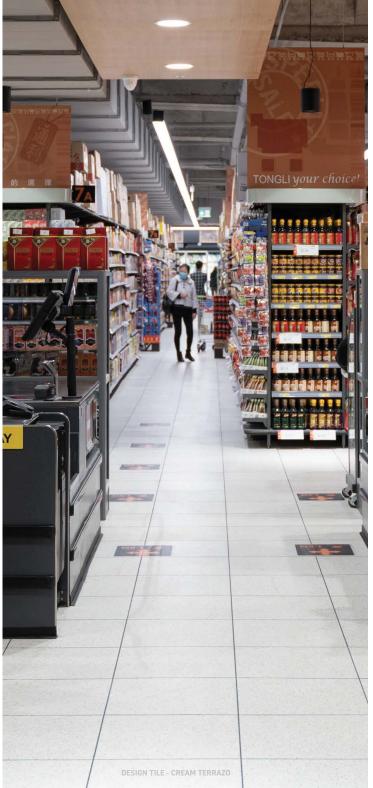



ADVANTAGES OF DESIGN RANGE

- Can be installed on most existing floors
- Saves time and cost
- Easy installation, maintenance and cleaning
- Fire Retardant Properties
- Low Volatile Organic Compound (VOC) emissions and recyclable
- Looks like ceramic and timber but performs like LVT (i.e. durable but pleasant to walk on)
- In retail environments, can be installed while store is trading in most circumstances
- Outstanding durability for heavy duty loads (i.e. suitable for pallet jacks and trolleys)
- Unique construction reduces ambient and impact noises



Easy Installation & Maintenance



Recyclable



Fire Retardant Properties




R10 Slip Rating



Proven Durability



Improves
Acoustic
Performance

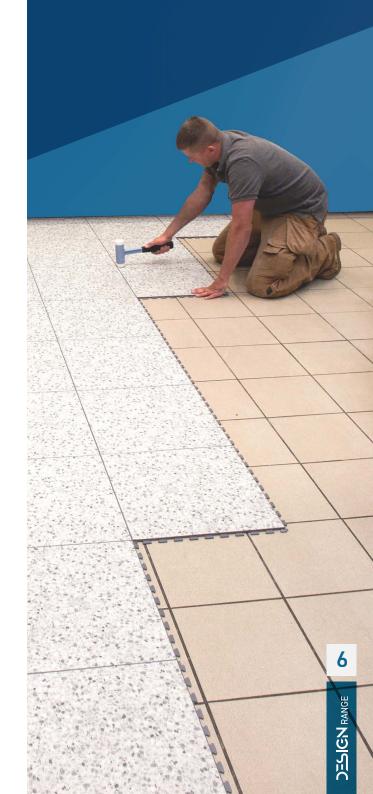

SUSTAINABLE MANUFACTURING

The TekTile range of tiles are designed and manufactured with the environment in mind. Once they have reached the end of their lifecycle, we can collect the tiles and recycle them to produce the next generation of TekTile products.

We are proudly manufacturing our tiles without any wastage as any rejected and surplus material is recycled.





COMPOSITION

FREE of Formaldehyde FREE of heavy metals FREE of solvent



LIFE CYCLE ANALYSIS

Eco-designed according to a product specific Life Cycle Analysis Product specific EPD (Environmental Products Declaration) available Manufactured in an ISO 14001 compliant site



MADE WITH RECYCLED CONTENT

Up to 80% recycled content is used in the making of TekTile products






INSTALLATION

Adhesive free installation (note: gluing around refrigerated cases is recommended)



RECYCLING

100% of the tiles can be recycled at the end of the life cycle

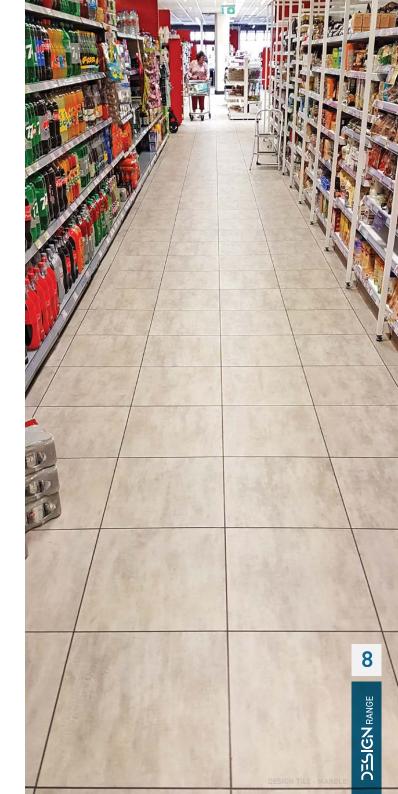

PROFILE EDGE ADD-ON

The Profile Edge is manufactured using high quality aluminium to withstand repeated foot and wheeled traffic impacts. It provides a safe transition between wood, tiles and other resilient floor coverings.

This profile incorporates a slip-resistant PVC insert available in 3 options: grey, black and brown.

Type:

Environment:

Material:

Width:

Gauge:

Length:

Ramp Profile


Interior

Aluminium/PVC

84mm

8mm

2.50m

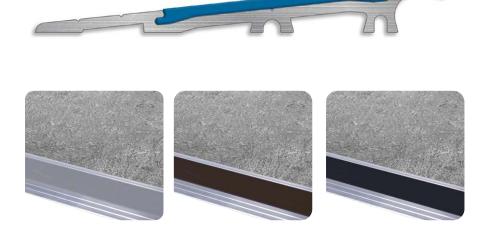



ENTRANCE MAT ADD-ON

- Full kit ready-to-lay including the mat, frame sections and fastenings
- · Withstands intensive foot traffic
- Surface not damaged (no adhesives or screws)
- Full 100% loose lay system



DESIGN RANGE TECHNICAL SPECIFICATION

Technical Information	Standard	Design Tile
Floor covering to EN 649		Heterogeneous PVC
Tile Dimensions		457 x 457mm
Weight	EN430	9.6kg/m²
Thickness	BS EN 428	7.8mm
Wearing Layer	BS EN 429	0.7mm + Polyurethane
Protective Layer		Polyurethane Matt Finish
Castor Wheel	BS EN 425	No Damage
Indentation	BS EN 433	0.05mm
Fire Class	EN 13501-1	BFL s1
	AS ISO 9239.1 1-2003	Compliant
Anti Slip	AS 4586-2013 A	P3 (R10)*
Anti Slip (coefficient)	BS EN 13893	>.30
Chemical Resistance	BS EN 423	Good
Thermal Resistance	ISO 8302	+/-0.013m² K/W
Anti-Static Performance	BS EN 1815	Rubber sole: -1.0kV
		PVC sole: -1.7kV
Surface Treatment	PUR	PUR
Toxicity	EN71	Non-Toxi
VOC Emissions	AgBB/DIBt	Certified

^{*}TekTile Australia can manufacture custom product for different requirements. Contact our representatives to learn more.

